



www.dianhuolifire.com





**Fire Alarm
Professional Manufacturer**

**Eira Yang
Sales Manager**

WhatsApp



+86 18958926856

**Kevin Yang
General Manager**

WhatsApp



+86 13588941988

**Eira Yang
Sales Manager**

Wechat



+86 13968753933

Sales Manager: Erin

T 86-577 62620109

Mobile: +86 13968753933(Wechat)

www.dianhuolifire.com

**E-mail: kevinyang5a6@gmail.com
eirayyang@gmail.com**

Yueqing Dianhuoli Eechnology.Co.,Ltd

Thank you for you



CONVENTIONAL FIRE ALARM PANEL
Model DHL-FZ501/502/504
 Alarm output and siren output with rela
 AC input:220 VAC
 DC output:24 VDC



CONVENTIONAL FIRE ALARM PANEL
Model DHL-FZ501/502/504
 Alarm output and siren output with rela
 AC input:220 VAC
 DC output:24 VDC



CONVENTIONAL FIRE ALARM PANEL
Model DHL-FZ501/502/504
 Alarm output and siren output with rela
 AC input:220 VAC
 DC output:24 VDC




CONVENTIONAL FIRE ALARM PANEL
Model DHL-FZ506/508
 Alarm output and siren output with rela
 AC input:220 VAC
 DC output:24 VDC



SMOKE DETECTOR
Model DFS513
 Operated volt-9VDC-35VDC;
 Sensor:Optical sensor;
 Sensitivity-0.15 dB/m(± 0.03 dB/m);
 Standby current: $\leq 50\mu A$ (2 wires);
 Alarm current: $\leq 50mA$;



SMOKE DETECTOR
Model DFS515
 Operated volt-9VDC-35VDC;
 Sensor:Optical sensor;
 Sensitivity-0.15 dB/m(± 0.03 dB/m);
 Standby current: $\leq 50\mu A$ (2 wires);
 Alarm current: $\leq 50mA$;



SMOKE DETECTOR
Model DFS516
 Operated volt-9VDC-35VDC;
 Sensor:Optical sensor;
 Sensitivity-0.15 dB/m(± 0.03 dB/m);
 Standby current: $\leq 50\mu A$ (2 wires);
 Alarm current: $\leq 50mA$;



HEAT DETECTOR
Model DFT518
 Operated volt-9VDC-35VDC;
 Temp.Trip Point-57°C(135°F);
 Standby current: $\leq 50\mu A$ (2 wires);
 Alarm current: $\leq 50mA$;



SMOKE DETECTOR
Model DFS424
 Operated voltage-9V Battery(include);
 Sensor:Optical sensor;
 Sensitivity-0.086DB/M to 0.140DB/M;
 Alarm sound: $\geq 85dB(3M)$;



SMOKE DETECTOR
Model DFS425
 Operated voltage-9V Battery(include);
 Sensor:Optical sensor;
 Sensitivity-0.086DB/M to 0.140DB/M;
 Alarm sound: $\geq 85dB(3M)$;



SMOKE DETECTOR
Model DFS426
 Operated voltage-9V Battery(include);
 Sensor:Optical sensor;
 Sensitivity-0.086DB/M to 0.140DB/M;
 Alarm sound: $\geq 85dB(3M)$;



SMOKE DETECTOR
Model DFS427
 Operated voltage-9V Battery(include);
 Sensor:Optical sensor;
 Sensitivity-0.086DB/M to 0.140DB/M;
 Alarm sound: $\geq 85dB(3M)$;



FIRE CALL POINT
Model DHL-2D

Operated Volt-12/24VDC
Max.Current:10MA/ 24VDC



FIRE CALL POINT
Model DHL-2D-A

Operated Volt-12/24VDC
Max.Current:10MA/ 24VDC



FIRE CALL POINT
Model DHL-2D-B

Operated Volt-12/24VDC
Max.Current:10MA/ 24VDC



FIRE CALL POINT
Model DHL-01-1D

Operated Volt-12/24VDC
Max.Current:10MA/ 24VDC




FIRE CALL POINT
Model DHL-05-B

Operated Volt-12/24VDC
Max.Current:10MA/ 24VDC



FIRE CALL POINT
Model DHL-01

Operated Volt-220VAC
24VDC
Max.Current:5A 220V
8A 24VDC

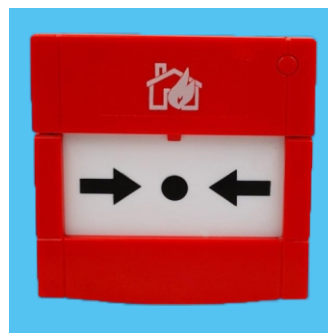

FIRE CALL POINT
Model DHL-05

Operated Volt-220VAC
24VDC
Max.Current:5A 220V
8A 24VDC



FIRE CALL POINT
Model DHL-05-1D

Operated Volt-12/24VDC
Max.Current: 24VDC/12mA



FIRE CALL POINT
Model DHL-05-C

Operated Volt-220VAC
24VDC
Max.Current:5A 220V
8A 24VDC



FIRE CALL POINT
Model DHL-05A

Operated Volt-220VAC
24VDC
Max.Current:5A 220V
8A 24VDC



FIRE CALL POINT
Model DHL-911

Operated Volt-24VDC
Max.Current:20mA/24VDC



FIRE CALL POINT
Model DHL-07

Operated Volt-24VDC
Max.Current:20mA/24VDC



FIRE CALL POINT
Model DHL-06

Operated Volt-220VAC
24VDC
Max.Current:5A 220V
8A 24VDC



FIRE CALL POINT
Model DHL-06TW

Operated Volt-220VAC
24VDC
Max.Current:0.5A 220V
8A 24VDC



FIRE CALL POINT
Model DHL-L1

Operated Volt-220VAC
24VDC
Max.Current:5A 220V
8A 24VDC



FIRE CALL POINT
Model DHF-L2

Operated Volt-220VAC
24VDC
Max.Current:5A 220V
8A 24VDC



FIRE BUTTON
PROTECTION COVER
Model DHL-PC-A



FIRE BUTTON
PROTECTION COVER
Model DHL-PC-B



GAS DISCHARGE/EXIT
Model DHL-413

Operated volt-12VDC/24VDC
Size-85X85X35mm
Working Current-15mA



REMOTED INDICATOR
Model DHL-414

Operated volt-12VDC/24VDC
Size-85X85X25mm
Working Current-15mA



REMOTED INDICATOR
Model DHL-415

Operated Volt-220VAC
24VDC
Max.Current:5A 220V
8A 24VDC



REMOTED INDICATOR
Model DHL-416



ABORT SWITCH
Model DHL-417




BREAK GLASS FOR KEY
Model DHL-418



FIRE ALARM BELL
Model FACB-6

Size: $\Phi 150\text{mm}$;
Operating voltage: DC24V
Working current: $\leq 50\text{mA}$
Audio Alarm: $\geq 95\text{dB}$

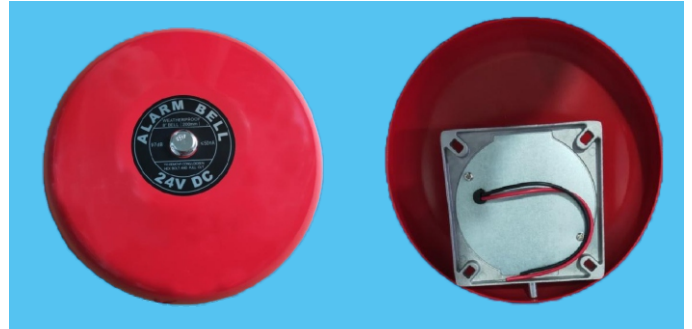

FIRE ALARM BELL
Model FACB-8

Size: $\Phi 200\text{mm}$;
Operating voltage: DC24V
Working current: $\leq 50\text{mA}$
Audio Alarm: $\geq 97\text{dB}$



FIRE ALARM BELL
Model FASS-6

Size: $\Phi 150\text{mm}$;
Operating voltage: DC24V
Working current: $\leq 50\text{mA}$
Audio Alarm: $\geq 95\text{dB}$

BOX

FIRE ALARM BELL
Model FASS-8

Size: $\Phi 200\text{mm}$;
Operating voltage: DC24V
Working current: $\leq 50\text{mA}$
Audio Alarm: $\geq 97\text{dB}$



FIRE ALARM BELL
Model FASS-6A

Size: $\Phi 150\text{mm}$;
Operating voltage: DC24V
Working current: $\leq 50\text{mA}$
Audio Alarm: $\geq 95\text{dB}$



FIRE ALARM BELL
Model FASS-6UK

Size: $\Phi 150\text{mm}$;
Operating voltage: DC24V
Working current: $\leq 50\text{mA}$
Audio Alarm: $\geq 95\text{dB}$




FIRE ALARM BELL
Model FATW-6

Size: $\Phi 150\text{mm}$;
Operating voltage: DC24V
Working current: $\leq 50\text{mA}$
Audio Alarm: $\geq 95\text{dB}$



FIRE ALARM BELL
Model FATW-6A

Size: $\Phi 150\text{mm}$;
Operating voltage: DC24V
Working current: $\leq 50\text{mA}$
Audio Alarm: $\geq 95\text{dB}$

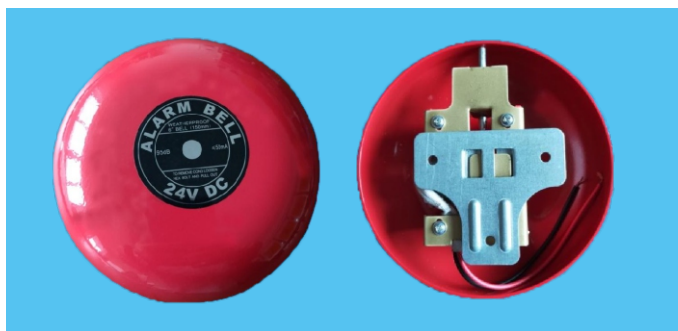

FIRE ALARM BELL
Model FASS-6C

Size: $\Phi 150\text{mm}$;
Operating voltage: DC24V
Working current: $\leq 50\text{mA}$
Audio Alarm: $\geq 95\text{dB}$



FIRE ALARM BELL
Model FASS-6B

Size: $\Phi 150\text{mm}$;
Operating voltage: DC24V
Working current: $\leq 50\text{mA}$
Audio Alarm: $\geq 95\text{dB}$



FIRE ALARM BELL
Model FASS-6-220

Size: $\Phi 150\text{mm}$;
Operating voltage: AC220V
Working current: 100mA
Audio Alarm: $\geq 97\text{dB}$



FIRE ALARM BELL
Model FATW-4

Size: $\Phi 100\text{mm}$;
Operating voltage: DC24V
Working current: 28mA
Audio Alarm: $\geq 85\text{dB}$



FIRE ALARM SIREN
Model DHL-LF01

Operated volt-24VDC;
Alarm current:80/120mA;
Alarm sound:≥105dB;



FIRE ALARM SIREN
Model DHL-LF01L

Operated volt-12/24VDC
Alarm current:40/60mA
Alarm sound:≥105d



FIRE ALARM SIREN
Model DHL-FI/SA

Operated volt-24VDC;
Alarm current:80/120mA;
Alarm sound:≥105dB;



FIRE ALARM SIREN
Model DHL-FI/SA-L

Operated volt-12/24VDC
Alarm current: 40/60mA
Alarm sound:≥105d



FIRE ALARM SIREN
Model DHL-FI/SF

Operated volt-24VDC;
Alarm current:80/120mA;
Alarm sound:≥105dB;



FIRE ALARM SIREN
Model DHL-FI/SA-LB

Operated volt-12/24VDC
Alarm current:40/60mA
Alarm sound:≥105d



FIRE ALARM SIREN
Model DHL-FI/SC

Operated volt-24VDC;
Alarm current:80/120mA;
Alarm sound:≥105dB;



FIRE ALARM SIREN
Model DHL-FI/SC-L

Operated volt-12/24VDC
Alarm current: 40/60mA
Alarm sound:≥105d



FIRE ALARM SIREN
Model DHL-FI/SA-LA

Operated volt-12/24VDC
Alarm current:40/60mA
Alarm sound:≥105d



FIRE ALARM SIREN
Model DHL-FI/SB

Operated volt-24VDC
Alarm current: 100mA
Alarm sound:≥105d



FIRE ALARM SIREN
Model DHL-FI/SBA

Operated volt-24VDC
Alarm current:40/60mA
Alarm sound:≥80dB



FIRE ALARM SIREN
Model DHL-FI/SBB

Operated volt-24VDC
Alarm current:40/60mA
Alarm sound:≥80dB



FIRE ALARM SIREN
Model DHL-FH311

Operated volt-24VDC
Alarm current: 40/60mA
Alarm sound: ≥80dB




FIRE ALARM SIREN
Model DHL-LF103

Operated volt-24VDC
Alarm current: 300mA
Alarm sound: ≥105dB



FIRE ALARM SIREN
Model DHL-LF

Operated volt-12/24VDC
Alarm current: 20mA
Alarm sound: ≥105dB

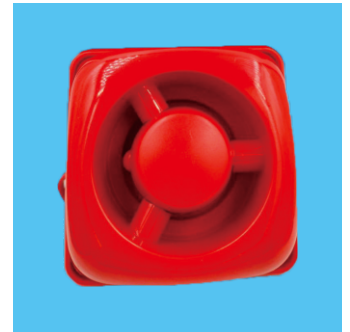

FIRE ALARM SIREN
Model DHL-LFS

Operated volt-12/24VDC
Alarm current: 20mA
Alarm sound: ≥105dB



EMERGENCY LIGHT
MODEL DHL-EL

Input Ratings: 120-277Vac, 50/60Hz,
75mA, 5.0W
Emergency Output Ratings: 1.3W
Emergency Run Time: 180 Minutes
Recharge Time: 24 Hours




**SOLAR-POWERED CAST
ALUMINUM ROAD SPIKE LAMP**
MODEL DHL-TT10R

Operated volt-2V
Alarm current: 180mA
Battery: 1.2V 300mAH



**SOLAR-POWERED CAST
ALUMINUM ROAD SPIKE LAMP**
MODEL DHL-TT10Y

Operated volt-2V
Alarm current: 180mA
Battery: 1.2V 300mAH

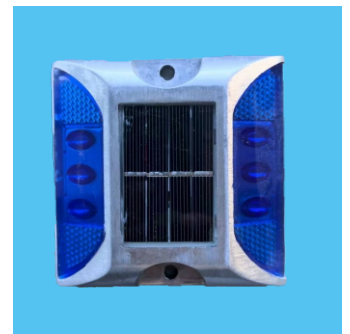

**SOLAR-POWERED CAST
ALUMINUM ROAD SPIKE LAMP**
MODEL DHL-TT10B

Operated volt-2V
Alarm current: 180mA
Battery: 1.2V 300mAH



MINI SIREN
Model DHL-MS-190

Operated volt-220VAC
Alarm current: 200mA
Alarm sound: ≥105dB



MINI SIREN
Model DHL-MS-290

Operated volt-220VAC
Alarm current: 350mA
Alarm sound: ≥105dB



MINI SIREN
Model DHL-MS-390

Operated volt-220VAC
Alarm current: 500mA
Alarm sound: ≥110dB



MINI SIREN
Model DHL-MS-490

Model DHL-MS-590
Model DHL-MS-690
Model DHL-MS-790

FIRE ALARM SYSTEM COMBINATION



Model DHL-FSC



Model DHL-FSD



Model DHL-FSE

HAND-CRANKED ALARM

Model DHL-200B

Model DHL-200L

Model DHL-100



